

# JOTAROGF

**SUPERIOR ROOF PROTECTION** 



#### Disclaimer

We have made every effort to make the colours on screen as close to actual paint colours as computer screen resolutions as allow. Please refer to paint chop samples for an accurate match. Colours will vary depending on your screen settings and resolution. Applied sample is recommended when colour matching is critical.

## JOTAROOF **SUPERIOR ROOF PROTECTION**

Jotaroof is developed using a proven and tested 100% pure acrylic formulation which delivers unrivalled durability. This formula provides superior protection to your roof; giving you peace of mind, year after year.



## 2x Heat Reflective

Using the revolutionary infrared reflective pigments technology, Jotaroof reflects up to twice the amount of heat away from your roof. While reflecting heat away from your home, you get to enjoy excellent indoor thermal comfort. Best of all, you can save on energy cost!





#### 2x UV Protected Colours


Jotaroof's unique 2x UV Protected Colours feature offers outstanding resistance to the damaging effects of solar Ultraviolet (UV) and rays. It assures colours of your roof will remain vibrant and lustrous for a long time.



Toffee 2403



Rouge






Royal Blue 4224



4400 Blue Marine



2401

Roast Coffee 2549





7528

Tree



5366 Tar

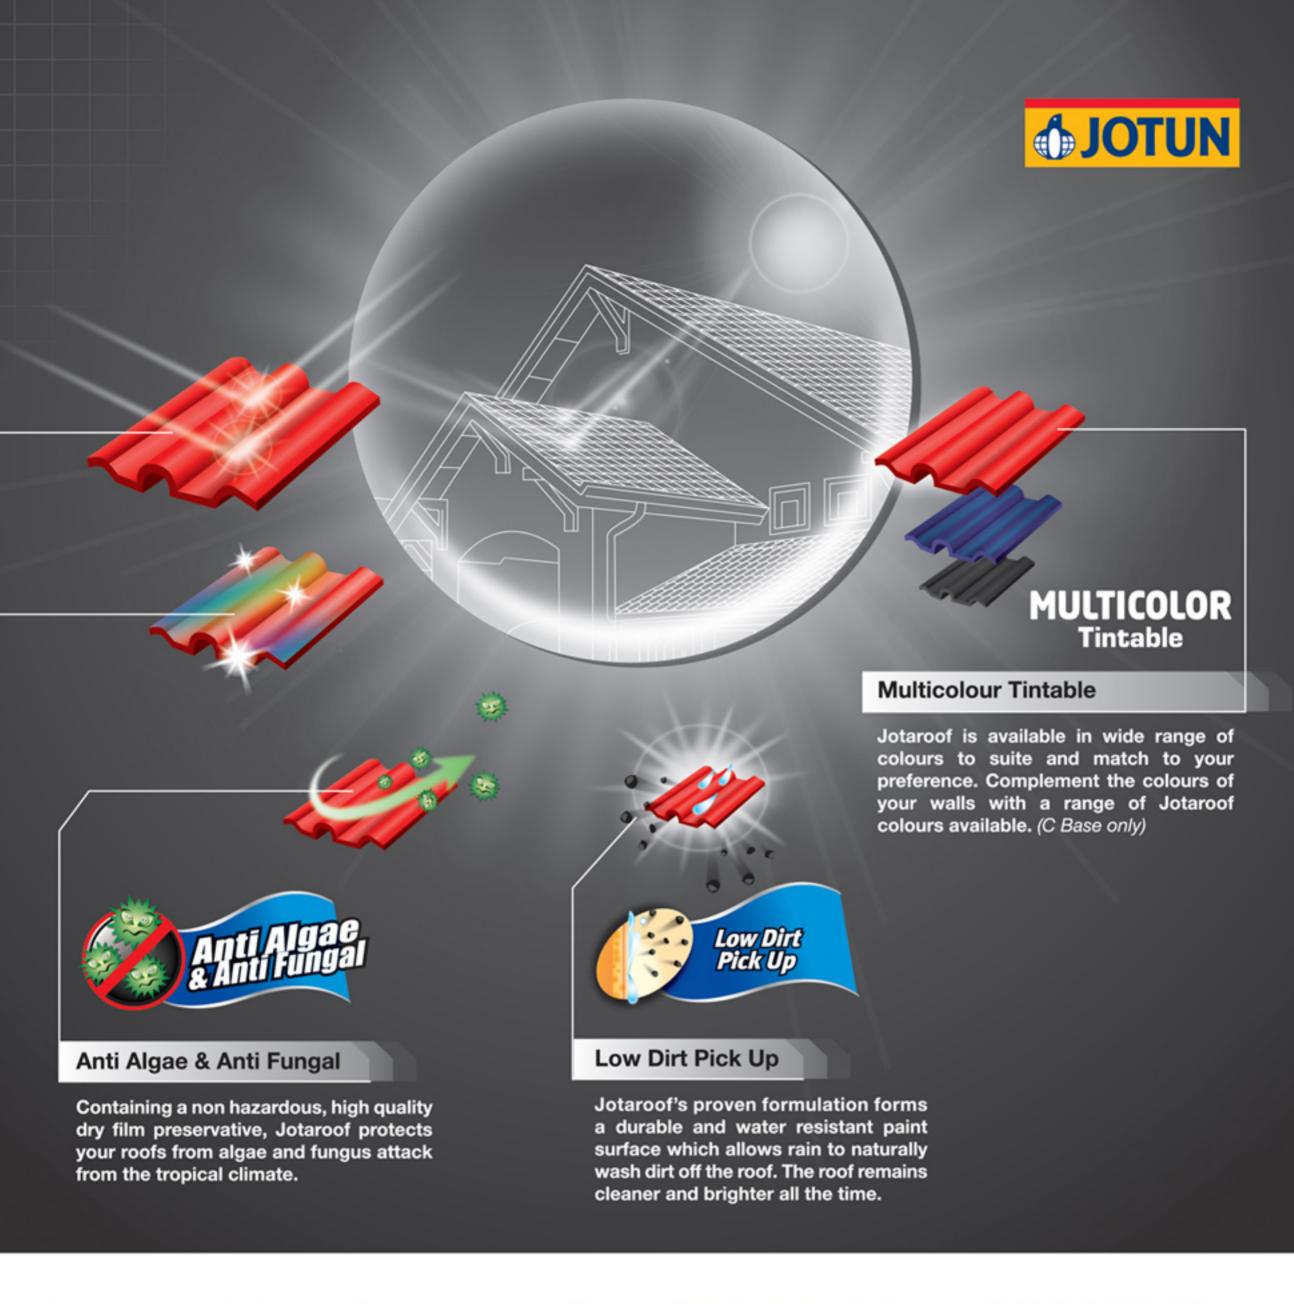

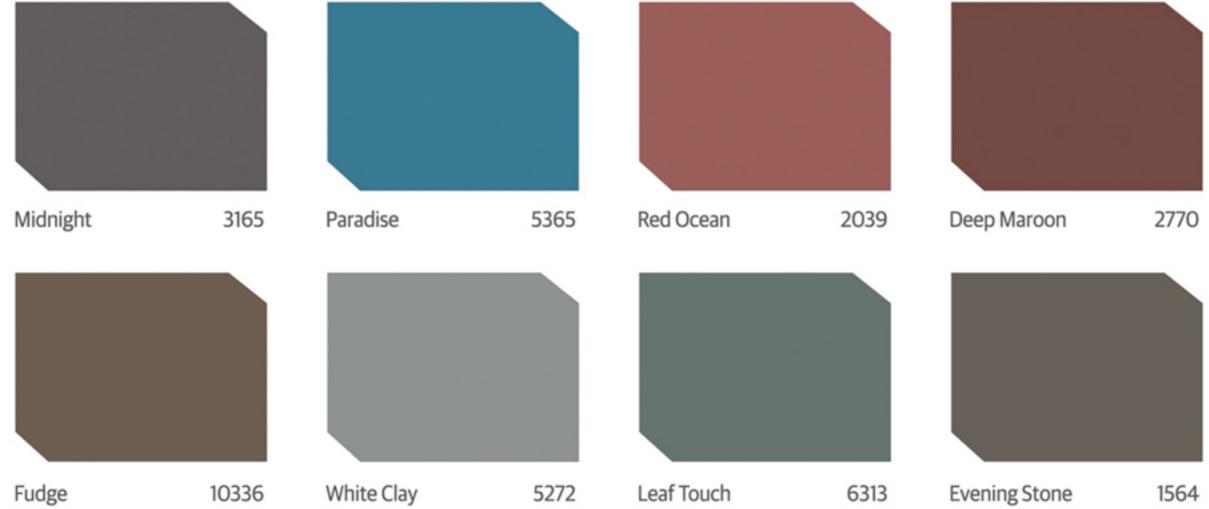

# **JOTAROOF**



















## **Application Guide**

Surface Preparation	Surface to be painted should be dry and clean, free from flake, chalk, dirt, fungus and algae. For old surfaces, water jetting is recommended followed by fungicidal wash (if necessary).
Primer for Optimal Results	Ensure all sides, interlocks and joints of the roof system are primed with the recommended primer.
Recommended Paint System - Roof Tiles	1 Coat of Cito Primer 09 2 Coats of Jotaroof
Recommended Paint System - Metal Deck or Steel Roof	1 Coat of Gardex Primer 2 Coats of Jotaroof
Paint Coverage (on normal smooth surface)	9 - 12 m²/liter
Drying time for recoating	2 hours
Thinning	Mix no more than 5% of water if thinning is required.

Please contact your local Jotun office for product specifications and availability. For more information on the product usage, handling procedures and technical data, kindly refer to our Technical Data Sheets.

# Jotun ColourAdvisor

Colour your imagination with Jotun ColourAdvisor To find out more, log on to www.jotun.com/ap



#### **JOTUN IN ASIA PACIFIC**

### MALAYSIA

JOTUN (MALAYSIA) SON. BHD. Lot 7, Persiaran Perusahaan, Seksyen 23, 40300 Shah Alam, Selangor, Malaysia. Tel: +603 5123 5500

#### SINGAPORE

JOTUN (SINGAPORE) PTE. LTD. 37 Tuas View Crescent, Singapore 637236. Tel: +65 6508 8288 www.jotun.com/ap

JOTUN COATINGS (ZHANGJIAGANG) CO. LTD. Floor 20, Jiu Shi Mansions, No 28, Zhong Shan Road ( South), Shanghai, China. Tel: +86 21 63330800

JOTUN THAILAND LTD. 49/26, Moo 12, Kingkaew Road, Rajataewa Bangplee, Samutprakarn 10540, Thailand.

#### INDONESIA

P. T. JOTUN INDONESIA Kawasan Industri MM 2100, Blok KK-1, Cikarang Barat, Bekasi 17520, Indonesia. Tel : +62 21 8998 2657

JOTUN PAINTS (VIETNAM) CO. LTD. No.1 Street 10, Song Than 1 Industrial Zone, Binh Duong Province, Vietnam. Tel: +84-650 3742206

